



## **iD 105.105 D** Electric Modular Oven for Pizza



### **EXTERNAL CONSTRUCTION**

- Front structure in shaped stainless steel
- Oven panels made pre-painted metal sheets
- Door in stainless steel with shutter with hinge at bottom with balancing spring
- Door handle in stainless steel
- Tempered crystal glass
- Jutting control panel on the right front side
- Vapour outlet in stainless steel

### **INTERNAL CONSTRUCTION**

- Baking surface in refractory brick
- Upper and lateral structure in aluminized sheet
- Thermal insulation in mineral wool

### **FUNCTIONING**

- Heating by armoured heating elements
- Electronic temperature management with independent adjustment of ceiling and floor
- Maximum temperature reached 450°C
- Continuous temperature monitoring with 2 thermocouple for every baking chamber

### **STANDARD EQUIPMENT**

- Illumination by incandescent light
- Independent maximum temperature safety device for every baking chamber

### **OPTIONAL AND ACCESSORIES (WITH SURCHARGE)**

- Prover on wheels, height 1000 mm
- Support without trayholder slides, height 600 mm
- Support without trayholder slides, height 900 mm
- 4 wheels kit
- Additional trayholder slides
- Hood



**MORETTI FORNI S.P.A.**

[www.morettiforni.com](http://www.morettiforni.com)

e-mail: [marketing@morettiforni.com](mailto:marketing@morettiforni.com)


Via A.Meucci, 4 - 61037 Mondolfo (PU) ITALIA

Tel. +39.0721.96161 - Fax +39.0721.9616299



## iD 105.105 D

(assembled with support height 900 mm)

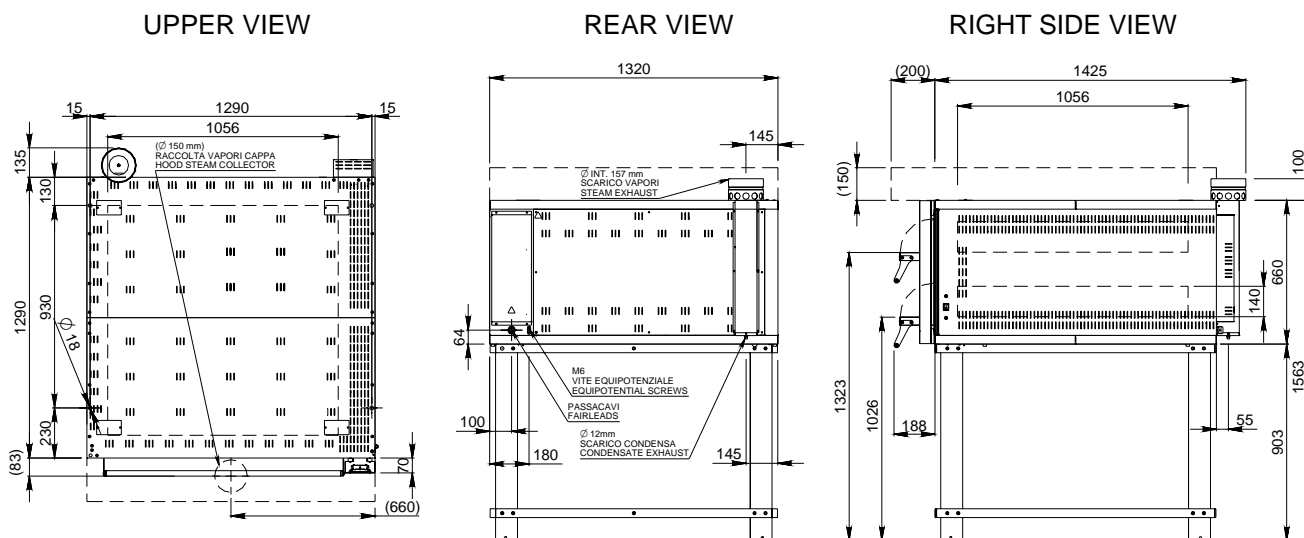

**Note:** The dimensions in the views are in millimetres.

### SPECIFICATION

The appliance is constituted by two baking decks and eventually by prover or support. The baking surface is in refractory material that allow a perfect distribution of heat on the whole surface making able the oven especially for the pizza baking directly on the ground or in trays. The temperature adjustment is electromechanic, the control of the heating elements of the ceiling and the ground are independent. The door has shutter with hinge at bottom with balancing spring and tempered crystal glass to control the baking point of the product. The support is in painted metal structure, the prover is in stainless steel equippe by a thermostat for heating. The temperature of the prover reach maximum 65°C and the baking deck reach maximum 450°C.

### All the data here under referred to two baking decks composition

#### DIMENSIONS

External height	760 mm
External depth	1495 mm
External width	1320 mm
Weight	282 Kg
Total baking surface	2,3 m <sup>2</sup>

#### SHIPPING INFORMATION

Packed oven sizes:	
Maximum height	910 mm
Maximum depth	1550 mm
Maximum width	1410 mm
Weight	(282+25) Kg

#### POWER SUPPLY AND POWER

<i>Standard power supply</i>	
A.C. V 400 3N	
<i>Optional power supply</i>	
A.C. V230 3	
Frequency	50/60 Hz
Maximum power	23,1 Kw
*Average power consum.	11,6 Kw/h
Connection cable	
type FG7R	
5x10 mm <sup>2</sup> (V400 3N)	
4x16 mm <sup>2</sup> (V230 3)	

#### TOTAL BAKING CAPACITY

Pizzas diam.	300 mm	18
Pizzas diam.	450 mm	8
Trays (600x450) mm		8

Power Supply (optional prover)	
A.C. V 230 1 N Hz	
Maximum power	1,5 Kw
*Average power consum.	0,8 Kw/h

\*This value is subject to variation according to the way in which the equipment is used

-NOTE: Moretti Forni Spa reserves the right to modify the characteristics of the products illustrated in this publication without prior notice