



P60E

Modular Electric Oven for Pizza

COMPOSITION WITH 3 COOKING DECKS



EXTERNAL CONSTRUCTION

- Structure in folded steel sheet
- Side panels in coloured sheet
- Stainless steel hood with top in aluminized sheet
- Front vapour collection hood in enameled steel sheet
- Exhaust steam chimney in steel sheet
- Downward-opening stainless steel door hinged with spring balance system
- Tempered glass
- Handles in thermoplastic material
- Control panel on the right side
- Control panel and side panels in a colours range suitable to the Ipergres elements

INTERNAL CONSTRUCTION

- Bottom in refractory bricks
- Sides and ceiling in aluminized steel
- Thermal insulation in rock wool

FUNCTIONING

- Heating by armored heating elements
- Electronic temperature setting with independent regulation of the ceiling and the bottom
- Max. temperature 450°C
- Continuous temperature survey by mean of a thermocouple
- Steam exhaust by mean of a manual butterfly valve

STANDARD EQUIPMENT

- Lighting system by mean of incandescent lamp
- Timer
- Energy saver
- Independent safety system of max. temperature
- 20 customisable programs

OPTIONAL AND ACCESSORIES (WITH ADDITIONAL PRICE)

- Leavening prover on wheels, height 600 mm
- Leavening prover on wheels, height 800 mm
- Support on wheels, height 600 mm
- Support on wheels, height 800 mm
- Support on wheels, height 950 mm
- Additional tray holder slides for prover and support
- Spacer element height 300 mm
- Suction hood

(WITHOUT SURCHARGE)

- Front vapour collection hood in stainless steel sheet



MORETTI FORNI S.P.A.

www.morettiforni.com


e-mail: marketing@morettiforni.com

Via A.Meucci, 4 - 61037 Mondolfo (PU) ITALIA

Tel. +39.0721.96161 - Fax +39.0721.9616299

P60E 3 decks

(assembled with support height 600 mm)

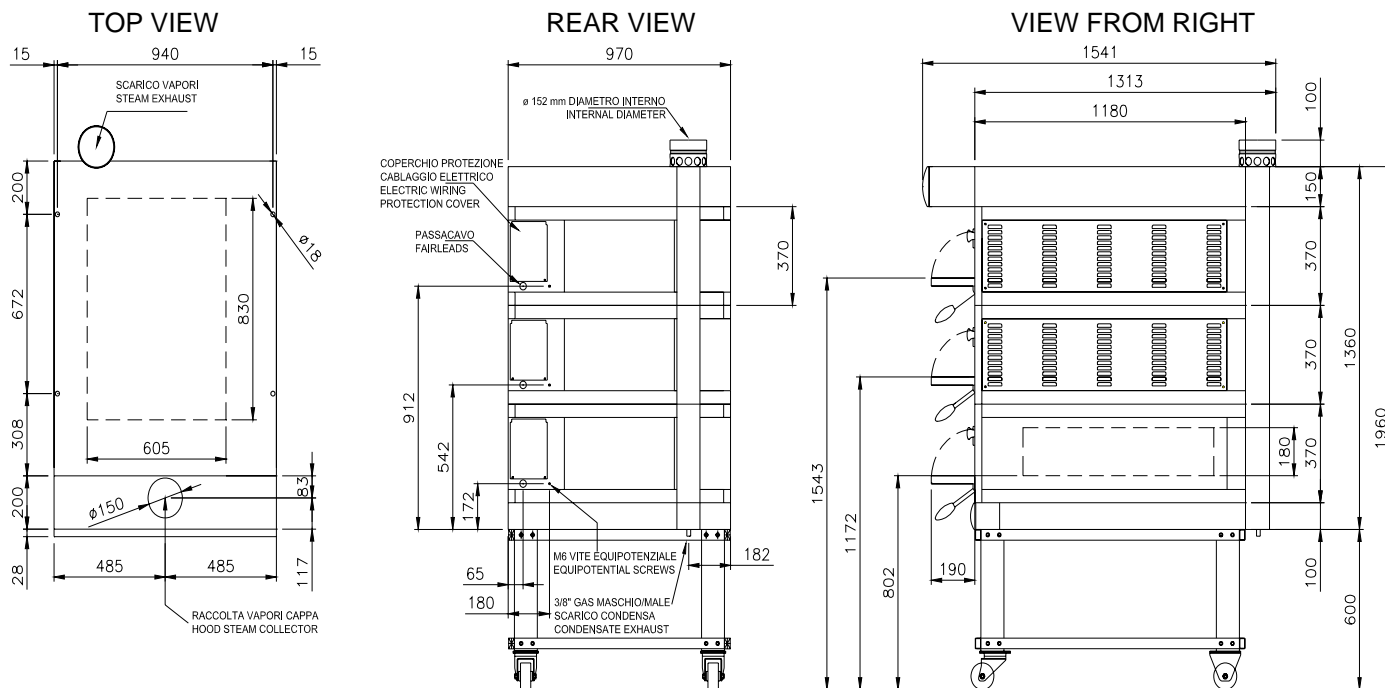

Note: The dimensions indicated in the views are in millimetres.

SPECIFICATIONS

The equipment consists in three independent cooking decks and an eventual leavening prover or support. The baking deck bottom is in embossed sheet steel which grants a perfect heat distribution on all the surface, making this oven particularly suitable for the pastry. The temperature regulation is electronic, the ceiling and bottom heating elements control is independent. The oven door is downward-opening and hinged with tempered glass to control the product baking level. The support consists in a structure in coloured metal, the prover structure at the contrary is in stainless steel and it is equipped with a thermostat for the heating. The prover reaches a max. temperature of 65° C and the max. temperature of the baking deck is 450°

All the dates here under indicated are referred to the composition with 3 baking decks

DIMENSIONS

External height	1460 mm
External depth	1541 mm
External width	970 mm
Weight (support excluded)	319 kg
Total baking surface	1.5 m ²

SHIPPING INFORMATION

Package in wood cage	
Height	1610 mm
Depth	1741 mm
Width	1170 mm
Weight	(319+10) kg

POWER SUPPLY AND POWER

<i>Standard feeding</i>	
A.C. V 400 3N	
<i>Feeding on request</i>	
A.C. V230 3	
Frequency	50/60 Hz
Max Power	23.7 kW
* Medium consum/hour	11.8 kWh
Connection cable	
type H07RN-F	
5x4 mm ² (V400)	
4x6 mm ² (V230 3)	
Prover feeding	
A.C.V 230 1 N 50/60 Hz	
Max Power	1.5 kW
* Medium consum/hour	0.8 kWh

TOTAL BAKING CAPACITY

Pizzas diam. 300 mm	12
Pizzas diam. 450 mm	3
Tray (600x400) mm	4

In case of composition with prover or support:	
Max height	2560 mm
Max weight	(385+10) kg

*This value is subject to variation according to the way in which the equipment is used

-NOTE: Moretti Forni Spa reserves the right to modify the characteristics of the products illustrated in this publication without prior notice